


The hang it dang it quilt hanger is designed to hang your quilt on a wall, from your ceiling or anywhere else on one nail or hook. It does this by using a sleeve sewn along the top edge of your quilt on the back. If your quilt has a sleeve proceed to step 1., If it does not proceed to step 7.

Instructions:

1. Remove the hanger bracket from the hanger rod by sliding it along the hanger rod away from the magnetic center. Set the hanger bracket aside, you will use it in step six. Looking at the back of your quilt, find the center point on the top edge and place a straight pin there. (See figure 1). A quick way to do this is to fold your quilt in half.



Figure 1

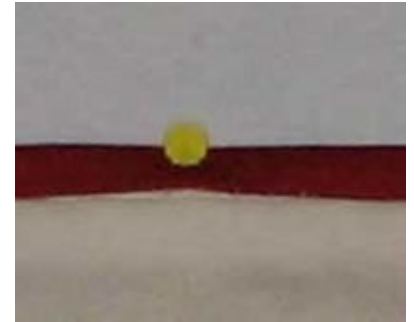

2. Place your quilt on a flat surface with the sleeve side up making sure the sleeve lies flat and straight. Lay the hang it dang it on the sleeve with the center mark aligned with the straight pin. (See figure 2) Loosen the end tubes with a slight ¼ turn twist and extend each end tube out to the edge of the sleeve and gently retighten. (See figure 2a) It takes very little effort to lock the tubes in place, do not over tighten them. At this point, the center mark of the hang it dang it should be aligned with the straight pin and the end tubes should be aligned with the edges of the sleeve on either side.



Figure 2



Figure 2a

3. Insert the hang it dang it into the sleeve keeping it snug to the top edge with the ends aligned with the edges of the sleeve. (See figure 3, 3a)



Figure 3



Figure 3a

4. Attach the bracket to the hang it dang it. Grasp the hanger bracket firmly on each end and attach it to the hanger rod in the center as shown (See figure 4). The bracket will snap on to the hanger rod and remain held in place by the magnet. This may take a couple of tries until you get the feel for it. (to remove bracket see step 6)



Figure 4

Hang your quilt on the wall and enjoy it, knowing you can change it to a different one just as fast and easy!



5. If your quilt is not hanging level, this means the hanger bracket is not centered or the weight is not evenly distributed. You can adjust this by grasping the quilt and hanger rod in one hand and sliding the hanger bracket slightly towards the low corner. If this does not solve the problem, go to step 6 and then repeat steps 1 through 4.

6. There are two ways to remove the hanger bracket when it is installed on a quilt. The first is to hold the bracket and quilt while pulling the hanger rod out of the sleeve. The second way is to hold it on a flat surface and use your thumb to pop it off.

7. If your quilt does not have a hanging sleeve you can purchase a premade one at Quilters Hangup or you can find instructions to make one at:

<http://aqspublishing.blogspot.com/2009/10/step-by-step-instructions-for-adding.html> Your feedback is important.